


# WINDOW SYSTEMS

## SERIES 7400 OPERABLE WINDOW




- 2-1/4" (57 mm) Depth
- AW-75 Rated (Operable and Fixed)
- Projected, Fixed or Casement
- Multitude of Hardware Options
- Reinforced Corner Construction
- Struct-Link II™ Thermal Break
- Flush Sash With Frame Design
- 90° Corners, Compensation Channels, Starter Sills, and Sill Flashing

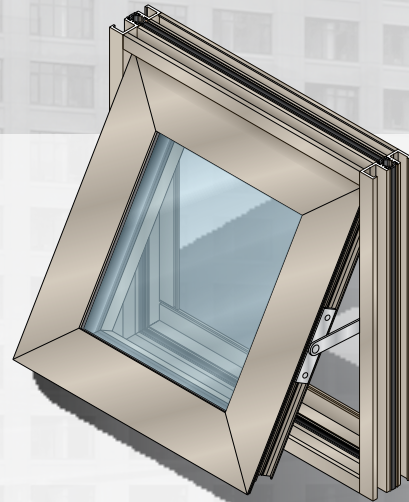



The Series 7400 is a 2-1/4" (57 mm) Operable Window that was successfully tested to ANSI/AAMA/NWDA-1011.5 2-97 requirements. The 7400 Window is constructed using extruded tubular members mitered and crimped with corner keys. These windows are offered in projected, fixed, and casement configurations. Series 7400 also features the Struct-Link II™ Thermal Break Design to provide maximum thermal properties.

# SERIES 7400 WINDOW TYPICAL DETAILS

## PROJECT OUT

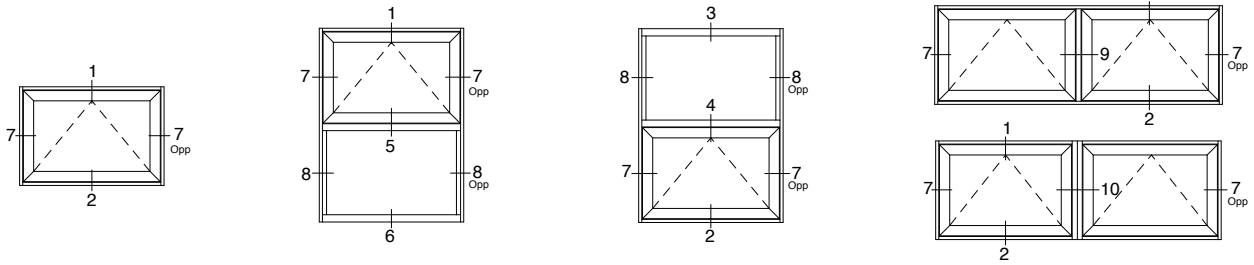

## PROJECT OUT CASEMENT

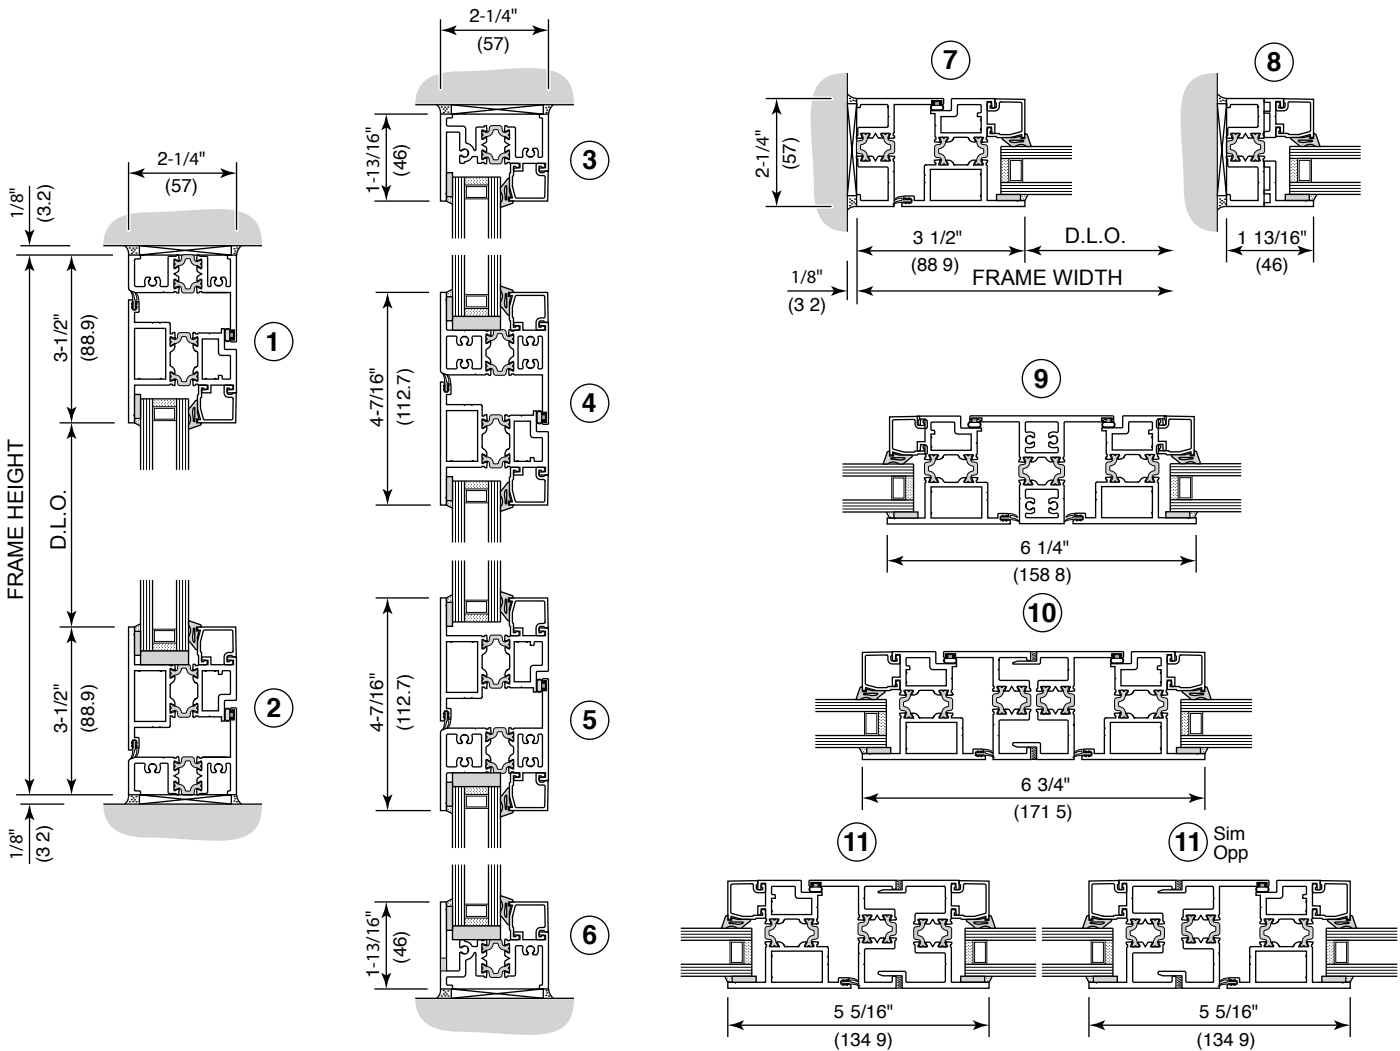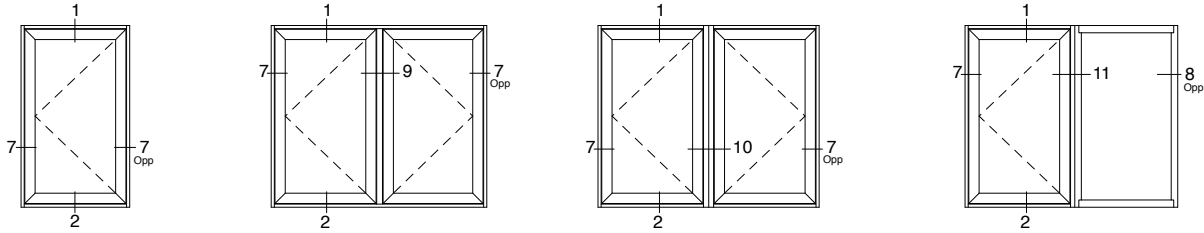

NOT TO SCALE

Typical details of project out window are shown. Refer to the Architectural Design Manual for a complete product listing.